

**Migrate to the new Agilent MXG X-Series
signal generator and generate true performance**

The new MXG exceeds the ESG's performance in every category - output power, ACPR, EVM, phase noise, bandwidth and memory depth - and offers a wider range of signal simulation, with both real-time and arbitrary waveform generation capabilities. For more information, visit www.agilent.com/find/X-Series_SG



**Agilent E4438C ESG
Vector Signal Generator**

Data Sheet



Table of Contents

- Introduction 3
- Key Features 4
- Specifications for Frequency and Power Characteristics 5
 - Frequency 5
 - Sweep modes 5
 - Internal reference oscillator 5
 - Output power 6
 - Level accuracy 6
 - Repeatability and linearity 8
 - Spectral purity 10
- Specifications for Analog Modulation 12
 - Frequency bands 12
 - Frequency modulation 12
 - Phase modulation 13
 - Amplitude modulation 13
 - Wideband AM 14
 - Pulse modulation 14
 - Internal modulation source 15
 - External modulation inputs 15
 - External burst envelope 16
 - Composite modulation 16
 - Simultaneous modulation 16
- Specifications for I/Q Characteristics 17
 - I/Q modulation bandwidth 17
 - I/Q adjustments 18
 - Baseband generator [arbitrary waveform mode] 18
 - Baseband generator [real-time mode] 20
- Specifications for Signal Personality Characteristics 21
 - 3GPP W-CDMA 21
 - IS-95 CDMA 22
 - cdma2000[®] 22
 - Enhanced multitone 23
 - AWGN 23
 - Custom modulation 24
 - GSM/GPRS 25
 - EDGE/EGPRS 26
 - Bit error rate [BER] analyzer 26
- General Characteristics 27
 - Operating characteristics 27
 - Inputs and outputs 28
- Ordering Information 34
- Related Literature 35

Introduction

Agilent Technologies E4438C ESG vector signal generator incorporates a broad array of capabilities for testing both analog and digital communications systems. Flexible options provide test solutions that will evaluate the performance of nearly all current and proposed air interface standards. Many test functions can be customized to meet the needs of proprietary and other nonstandard wireless protocols as well. You can configure your instrument to address a wide variety of tests—from altering nearly every aspect of a digital signal or signal operating environment, to creating experimental signals. This flexibility, along with an architecture that accepts future enhancements makes the E4438C ESG vector signal generator an excellent choice for wireless communications system testing now and in the future.

**E4438C ESG
vector signal generator**

Choose your required frequency range as an Option when configuring your E4438C ESG vector signal generator. Please refer to the E4438C Configuration Guide for complete ordering information. Literature number 5988-4085EN.

Definitions

Specifications (spec): Specifications describe the instrument's warranted performance and apply after a 45 minute warm-up. All specifications are valid over the signal generators entire operating/environmental range unless otherwise noted. Supplemental characteristics, denoted typical or nominal, provide additional [nonwarranted] information useful in applying the instrument. Column headings labeled "standard" imply that this level of performance is standard, without regard for option configuration. If a particular option configuration modifies the standard performance, that performance is given in a separate column.

Typical (typ): performance is not warranted. It applies at 25°C. 80% of all products meet typical performance.

Nominal (nom): values are not warranted. They represent the value of a parameter that is most likely to occur; the expected or mean value. They are included to facilitate the application of the product.

Standard (std): No options are included when referring to the signal generator unless noted otherwise.

Key Features

Key standard features

- Expandable architecture
- Broad frequency coverage
- High-stability time-base
- Choice of electronic or mechanical attenuator
- Superior level accuracy
- Wideband FM and FM
- Step and list sweep, both frequency and power
- Built-in function generator
- Lightweight, rack-mountable
- 1-year standard warranty
- 2-year calibration cycle
- Broadband analog I/Q inputs
- I/Q adjustment capabilities and internal calibration routine
- Excellent modulation accuracy and stability
- Coherent carrier output up to 4 GHz

Optional features

- Internal baseband generator, 8 or 64 MSa (40 or 320 MB) memory with digital bus capability
- ESG digital input or output connectivity with N5102A Baseband Studio digital signal interface module
- 6 GB internal hard drive
- Internal bit error rate (BER) analyzer
- Enhanced phase noise performance
- High output power with mechanical attenuator
- Move all front panel connectors to the rear panel
- Real-time channel emulation, up to 4x2 MIMO, with the N5106A PXB MIMO receiver tester
- Signal Creation software
 - Signal Studio software
 - Embedded software
 - A complete list of software can be found in the ordering information section or at www.agilent.com/find/signalstudio

This document contains the measured specifications for the instrument platform and personalities. It does not contain a full list of features for all optional personalities. Please consult the individual product overviews for each personality for a full listing of all features and capabilities. These are listed at the end of this document.

Specifications for Frequency and Power Characteristics

Frequency

Frequency range																																																																															
<i>Option 1</i>																																																																															
501	250 kHz to 1 GHz																																																																														
502	250 kHz to 2 GHz																																																																														
503	250 kHz to 3 GHz																																																																														
504	250 kHz to 4 GHz																																																																														
506	250 kHz to 6 GHz [requires Option UNJ]																																																																														
Frequency minimum	100 kHz ²																																																																														
Frequency resolution	0.01 Hz																																																																														
Frequency switching speed⁴																																																																															
<table border="1"> <thead> <tr> <th colspan="2">Options 501-504</th> <th colspan="2">Options 501-504 with Option UNJ</th> <th colspan="2">Option 506 with UNJ</th> </tr> <tr> <th>Freq.⁴</th> <th>Freq./Amp.⁵</th> <th>Freq.⁴</th> <th>Freq./Amp.⁵</th> <th>Freq.⁴</th> <th>Freq./Amp.⁵</th> </tr> </thead> <tbody> <tr> <td colspan="6"><i>Digital modulation</i></td> </tr> <tr> <td colspan="6"><i>on</i></td> </tr> <tr> <td>< 35 ms</td> <td>< 49 ms</td> <td>< 35 ms</td> <td>< 52 ms</td> <td>< 41 ms</td> <td>< 57 ms</td> </tr> <tr> <td colspan="6"><i>off</i></td> </tr> <tr> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 16 ms</td> <td>< 17 ms</td> </tr> <tr> <td colspan="6"><i>[For hops < 5 MHz within a band]</i></td> </tr> <tr> <td colspan="6"><i>Digital modulation</i></td> </tr> <tr> <td colspan="6"><i>on</i></td> </tr> <tr> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 33 ms</td> <td>< 53 ms</td> </tr> <tr> <td colspan="6"><i>off</i></td> </tr> <tr> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 9 ms</td> <td>< 12 ms</td> <td>< 14 ms</td> </tr> </tbody> </table>		Options 501-504		Options 501-504 with Option UNJ		Option 506 with UNJ		Freq. ⁴	Freq./Amp. ⁵	Freq. ⁴	Freq./Amp. ⁵	Freq. ⁴	Freq./Amp. ⁵	<i>Digital modulation</i>						<i>on</i>						< 35 ms	< 49 ms	< 35 ms	< 52 ms	< 41 ms	< 57 ms	<i>off</i>						< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 16 ms	< 17 ms	<i>[For hops < 5 MHz within a band]</i>						<i>Digital modulation</i>						<i>on</i>						< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 33 ms	< 53 ms	<i>off</i>						< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 12 ms	< 14 ms
Options 501-504		Options 501-504 with Option UNJ		Option 506 with UNJ																																																																											
Freq. ⁴	Freq./Amp. ⁵	Freq. ⁴	Freq./Amp. ⁵	Freq. ⁴	Freq./Amp. ⁵																																																																										
<i>Digital modulation</i>																																																																															
<i>on</i>																																																																															
< 35 ms	< 49 ms	< 35 ms	< 52 ms	< 41 ms	< 57 ms																																																																										
<i>off</i>																																																																															
< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 16 ms	< 17 ms																																																																										
<i>[For hops < 5 MHz within a band]</i>																																																																															
<i>Digital modulation</i>																																																																															
<i>on</i>																																																																															
< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 33 ms	< 53 ms																																																																										
<i>off</i>																																																																															
< 9 ms	< 9 ms	< 9 ms	< 9 ms	< 12 ms	< 14 ms																																																																										
Phase offset	Phase is adjustable remotely [LAN, GPIB, RS-232] or via front panel in nominal 0.1° increments																																																																														

Sweep modes

Operating modes	Frequency step, amplitude step and arbitrary list
Dwell time	1 ms to 60 s
Number of points	2 to 65,535 (step sweep) 2 to 161 (list sweep)

Internal reference oscillator

Stability ¹		
	Standard	With Option UNJ or 1E5
Aging rate	< ±1 ppm/yr	< ±0.1 ppm/yr or < ±0.0005 ppm/day after 45 days
Temp [0 to 55° C]	(< ±1 ppm)	(< ±0.05 ppm)
Line voltage	(< ±0.1 ppm)	(< ±0.002 ppm)
Line voltage range	(+5% to -10%)	(+5% to -10%)
RF reference output		
Frequency	10 MHz	
Amplitude	4 dBm ±2 dB	
RF reference input requirements		
	Standard	With Option UNJ or 1E5
Frequency	1, 2, 5, 10 MHz ± 10 ppm	
Amplitude	-3.5 dBm to 20 dBm	
Input impedance	50 Ω	

- The E4283C is available as a vector platform only. For analog models refer to the E4282C.
- Performance below 250 kHz not guaranteed.
- Parentheses denote typical performance.
- To within 0.1 ppm of final frequency above 250 MHz or within 100 Hz below 250 MHz.
- Frequency switching time with the amplitude settled within ±0.1 dB.


5

Specifications for Frequency and Power Characteristics

Output power

Power			
	Options 501-504	With Option UNJ	Option 506
250 kHz to 250 MHz	+11 to -136 dBm	+15 to -136 dBm	+12 to -136 dBm
> 250 MHz to 1 GHz	+13 to -136 dBm	+17 to -136 dBm	+14 to -136 dBm
> 1 to 3 GHz	+10 to -136 dBm	+16 to -136 dBm	+13 to -136 dBm
> 3 to 4 GHz	+7 to -136 dBm	+13 to -136 dBm	+10 to -136 dBm
> 4 to 6 GHz	N/A	N/A	+10 to -136 dBm

Typical maximum available power



Level resolution			
	0.02 dB		
Level range with Attenuator Hold active			
	Options 501-504	with Option UNJ	Option 506
250 kHz to 1 GHz	23 dB	27 dB	24 dB
> 1 to 3 GHz	20 dB	26 dB	23 dB
> 3 to 4 GHz	17 dB	23 dB	20 dB
> 4 to 6 GHz	N/A	N/A	20 dB

Level accuracy [dB]

Options 501-504 ^{1,2}			
	Power level		
	+7 to -50 dBm	< -50 to -110 dBm	< -110 to -127 dBm
250 kHz to 2.0 GHz	±0.5	±0.5	±0.7 (+1.5)
2.0 to 3 GHz	±0.6	±0.6	±0.8 (+2.5)
3 to 4 GHz	±0.7	±0.7	±0.9 (+2.5)

With Option UNJ^{2,3}

	Power level		
	+10 to -50 dBm	< -50 to -110 dBm	< -110 to -127 dBm
250 kHz to 2.0 GHz	±0.5	±0.7	±0.8 (+1.5)
> 2.0 to 3 GHz	±0.6	±0.8	±1.0 (+2.5)
> 3 to 4 GHz	±0.8	±0.9	±1.3 (+2.5)

Option 506^{4,4}

	Power level		
	+7 to -50 dBm	< -50 to -110 dBm	< -110 to -127 dBm
250 kHz to 2.0 GHz	±0.6	±0.8	±0.8 (+1.5)
> 2.0 to 3 GHz	±0.6	±0.8	±1.0 (+2.5)
> 3 to 4 GHz	±0.8	±0.9	±1.5 (+2.5)
> 4 to 6 GHz	±0.8	±0.9	±1.5 (+2.5)

- Quoted specifications for 23 °C ± 5 °C. Accuracy degrades by less than 0.03 dB/°C over full temperature range. Accuracy degrades by 0.3 dB above +7 dBm, and by 0.6 dB above +10 dBm.
- Parentheses denote typical performance.
- Quoted specifications for 23 °C ± 5 °C. Accuracy degrades by less than 0.03 dB/°C over full temperature range. Accuracy degrades by 0.2 dB above +10 dBm, and by 0.6 dB above +13 dBm.
- Quoted specifications for 23 °C ± 5 °C. Accuracy degrades by less than 0.02 dB/°C over full temperature range. Accuracy degrades by 0.2 dB above +7 dBm.

6

Specifications for Frequency and Power Characteristics


Level accuracy with modulation turned on [relative to CW]	
Conditions:	[with PRBS modulated data; if using I/Q inputs, $\sqrt{I^2 + Q^2} = 0.5 \sqrt{\text{rms, nominal}}$]
Level accuracy with ALC on	
n/4 DQPSK or QPSK formats	
Conditions:	With raised cosine or root-raised cosine filter and a ≥ 0.35 with 10 kHz \leq symbol rate \leq 1 MHz at RF freq \geq 25 MHz; power \leq max specified -3 dB
	Options 501-504 Option 506
	±0.15 dB ±0.25 dB
Constant amplitude formats [FSK, GMSK, etc.]	
	Options 501-504 Option 506
	±0.1 dB ±0.15 dB
Level accuracy with ALC off^{1,2}	
(±0.15 dB) [relative to ALC on]	
Conditions:	After power search is executed, with burst off.
Level switching speed¹	
	Options 501-504 with Option UNJ Option 506
Normal operation [ALC on]	< 15 ms < 21 ms < 21 ms
When using power search manual	< 83 ms < 95 ms < 95 ms
When using power search auto	< 103 ms < 119 ms < 119 ms

- Parentheses denote typical performance.
- When applying external I/Q signals with ALC off, output level will vary directly with I/Q input level.


7

Specifications for Frequency and Power Characteristics

Repeatability and linearity

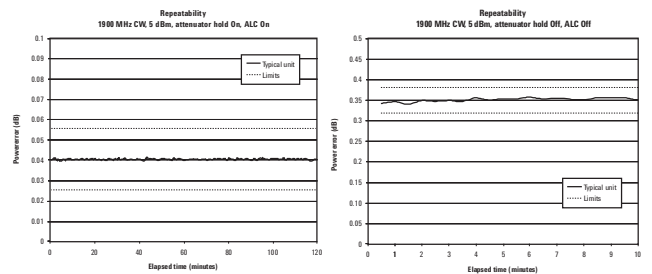

Repeatability measures the ability of the instrument to return to a given power setting after a random excursion to any other frequency and power setting. It is a relative measurement that reflects the difference in dB between the maximum and minimum power readings for a given setting over a specific time interval. It should not be confused with absolute power accuracy, which is measured in dBm.




Relative level accuracy measures the accuracy of a step change from any power level to any other power level. This is useful for large changes (i.e. 5 dB steps).





- Repeatability and relative level accuracy are typical for all frequency ranges.

8

Specifications for Frequency and Power Characteristics



Linearity measures the accuracy of small changes while the attenuator is held in a steady state (to avoid power glitches). This is useful for fine resolution changes. ¹



1. Repeatability and relative level accuracy are typical for all frequency ranges.

Specifications for Frequency and Power Characteristics

Spectral purity

	SSB CW Phase noise [at 20 kHz offset] ¹	
	Standard	With Option UNJ
at 500 MHz	< -124 dBc/Hz	< -135 dBc/Hz (< -138 dBc/Hz)
at 1 GHz	< -118 dBc/Hz	< -130 dBc/Hz (< -134 dBc/Hz)
at 2 GHz	< -112 dBc/Hz	< -124 dBc/Hz (< -128 dBc/Hz)
at 3 GHz	< -106 dBc/Hz	< -118 dBc/Hz (< -122 dBc/Hz)
at 4 GHz	< -106 dBc/Hz	< -118 dBc/Hz (< -122 dBc/Hz)
at 6 GHz	N/A	< -113 dBc/Hz (< -117 dBc/Hz)

Residual FM ¹ [CW mode, 0.3 to 3 kHz BW, CCITT, rms]

Option UNJ	< N x 1 Hz (< N x 0.5 Hz) ²
Standard	
Phase noise mode 1	< N x 2 Hz
Phase noise mode 2	< N x 4 Hz

Harmonics ^{1,3} [output level $\leq +4$ dBm, $\leq +7.5$ dBm Option UNB, $\leq +4.5$ dBm Option 506] < -30 dBc above 1 GHz, < -30 dBc 1 GHz and below

Nonharmonics ^{1,4} [$\leq +7$ dBm output level, $\leq +4$ dBm Option 506]

	Standard		With Option UNJ ⁴	
	> 3 kHz offset	> 10 kHz offset	> 3 kHz offset	> 10 kHz offset
250 kHz to 250 MHz	< -63 dBc (< -68 dBc)	< -58 dBc	< -65 dBc	< -68 dBc
250 MHz to 500 MHz	< -69 dBc (< -74 dBc)	< -81 dBc	< -80 dBc	< -80 dBc
500 MHz to 1 GHz	< -63 dBc (< -68 dBc)	< -75 dBc	< -80 dBc	< -80 dBc
1 to 2 GHz	< -47 dBc (< -62 dBc)	< -69 dBc	< -74 dBc	< -74 dBc
2 to 4 GHz	< -41 dBc (< -56 dBc)	< -63 dBc	< -68 dBc	< -68 dBc
4 to 6 GHz	N/A	N/A	< -62 dBc	< -62 dBc

	Standard		With Option UNJ	
	≤ 1 GHz	> 1 GHz	None	None
Subharmonics				
≤ 1 GHz	None	< -40 dBc	None	None
> 1 GHz				


Carrier frequency	SDNET/SDH data rates	rms jitter bandwidth	Standard		With Option UNJ	
			(μ J rms)	(μ J rms)	(μ J rms)	(μ J rms)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	(359)	(78)	(78)	(78)
622 MHz	622 MB/s	1 kHz to 5 MHz	(158)	(46)	(46)	(46)
2,488 GHz	2488 MB/s	5 kHz to 15 MHz	(384)	(74)	(74)	(74)

Carrier frequency	SDNET/SDH data rates	rms jitter bandwidth	Standard		With Option UNJ	
			(ps)	(ps)	(ps)	(ps)
155 MHz	155 MB/s	100 Hz to 1.5 MHz	(24 fs)	(0.6 ps)	(0.6 ps)	(0.6 ps)
622 MHz	622 MB/s	1 kHz to 5 MHz	(25 fs)	(74 fs)	(74 fs)	(74 fs)
2,488 GHz	2488 MB/s	5 kHz to 15 MHz	(155 fs)	(30 fs)	(30 fs)	(30 fs)

1. Parentheses denote typical performance.
2. Refer to frequency bands on page 12 for N values.
3. Harmonic performance outside the operating range of the instrument is typical.
4. Spurs outside the operating range of the instrument are not specified. Binsubband noise is not tested.
5. Specifications apply for FM deviations < 100 kHz and are not valid on FM. For non-constant amplitude formats, uncancelled spur levels occur up to the second harmonic of the baseband rate.
6. Specifications apply for CW mode only.
7. Calculated from phase noise performance in CW mode only at -25 dBm for standard instruments, -0.5 dBm with Option 506, and +2.5 dBm with Option UNB.
8. For other frequencies, data rates, or bandwidths, please contact your sales representative.

Specifications for Frequency and Power Characteristics

Characteristic SSB phase noise

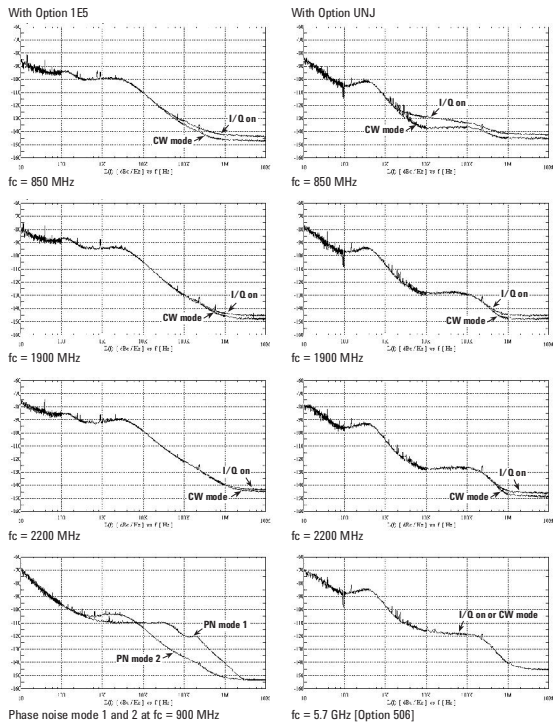

Frequency bands

Band	Frequency range	N number
1	250 kHz to ≤ 250 MHz	1
2	> 250 MHz to ≤ 500 MHz	0.5
3	> 500 MHz to ≤ 1 GHz	1
4	> 1 to ≤ 2 GHz	2
5	> 2 to ≤ 4 GHz	4
6	> 4 to ≤ 6 GHz	8

Frequency modulation ^{1,2}

	Standard		With Option UNJ	
	N x 8 MHz	N x 1 MHz	N x 8 MHz	N x 1 MHz
Maximum deviation ¹				
Resolution	0.1% of deviation or 1 Hz, whichever is greater			
Modulation frequency rate ⁴ [deviation = 100 kHz]				
Coupling	1 dB bandwidth	3 dB bandwidth		
FM path 1 [DC]	DC to 100 kHz	DC to 10 MHz		
FM path 2 [DC]	DC to 100 kHz	DC to 0.9 MHz		
FM path 1 [AC]	20 Hz to 100 kHz	5 Hz to 10 MHz		
FM path 2 [AC]	20 Hz to 100 kHz	5 Hz to 0.9 MHz		
Deviation accuracy ¹ [1 kHz rate, deviation < N x 100 kHz]	< $\pm 3.5\%$ of FM deviation + 20 Hz			
Carrier frequency accuracy relative to CW in DCFM ^{3,4}	$\pm 0.1\%$ of set deviation + (N x 1 Hz)			
Distortion ¹ [1 kHz rate, dev. = N x 100 kHz]	< 1%			
FM using external inputs 1 or 2				
Sensitivity	1 V _{rms} f for indicated deviation			
Input impedance	50 Ω , nominal			
FM path 1 and FM path 2 are summed internally for composite modulation. The FM 2 path is limited to a maximum rate of 1 MHz. The FM 2 path must be set to a deviation less than FM 1 path.				

1. All analog performance above 4 GHz is typical.
2. For non-Option UNJ units, specifications apply in phase noise mode 2 (default).
3. Refer to frequency bands on this page to compute specifications.
4. Parentheses denote typical performance.
5. At the calibrated deviation and carrier frequency, within 5°C of ambient temperature at time of calibration.

Specifications for Analog Modulation

Phase modulation ^{1,2}

Resolution	0.1% of set deviation		
Modulation frequency response ^{3,4}			
<i>Standard</i>			
<i>Allowable rates [3 dB BW]</i>			
<i>Mode</i>	<i>Maximum deviation</i>	<i>ΦM path 1</i>	<i>ΦM path 2</i>
Normal BW	N x 80 radians	DC to 100 kHz	DC to 100 kHz
High BW ⁵	N x 8 radians	(DC to 1 MHz)	(DC to 0.9 MHz)
	N x 1.6 radians	(DC to 10 MHz)	(DC to 0.9 MHz)
<i>With option UNJ</i>			
<i>Allowable rates [3 dB BW]</i>			
<i>Mode</i>	<i>Maximum deviation</i>	<i>ΦM path 1</i>	<i>ΦM path 2</i>
Normal BW	N x 10 radians	DC to 100 kHz	DC to 100 kHz
High BW	N x 1 radians	(DC to 1 MHz)	(DC to 0.9 MHz)
Deviation accuracy [1 kHz rate, Normal BW mode]			
< ±5% of deviation + 0.01 radians			
Distortion ¹ [1 kHz rate, deviation < 80 radians on standard model, < 10 N radians on Option UNJ models, Normal BW mode]			
< 1%			
ΦM using external inputs 1 or 2			
Sensitivity	1 V _{peak} f or indicated deviation		
Input impedance	50 Ω, nominal		
Paths	ΦM path 1 and ΦM path 2 are summed internally for composite modulation. The ΦM 2 path is limited to a maximum rate of 1 MHz. ΦM path 2 must be set to a deviation less than the FM path 1.		

Amplitude modulation ^{1,6} [fc > 500 kHz]

Range	0 to 100%	
Resolution	0.1%	
Rates [3 dB bandwidth]		
DC coupled	0 to 10 kHz	
AC coupled	10 Hz to 10 kHz	
Accuracy ^{4,7}	1 kHz rate	< ±(6% of setting +1%)
Distortion ^{4,1} [1 kHz rate, THD]		
	<i>Option 501-504/Option UNJ</i>	<i>Option 506</i>
30% AM	< 1.5%	< 1.5%
90% AM	(< 4%)	(< 5%)
AM using external inputs 1 or 2		
Sensitivity	1 V _{peak} f or indicated deviation	
Input impedance	50 Ω, nominal	
Paths	AM path 1 and AM path 2 are summed internally for composite modulation.	

- All analog performance above 4 GHz is typical.
- For non-Option UNJ units, specifications apply in phase noise mode 2 [default].
- Refer to frequency bands on page 12 for N.
- Parentheses denote typical performance.
- Bandwidth is automatically selected based on deviation.
- AM is typical above 3 GHz or if wideband AM or I/Q modulation is simultaneously enabled.
- Peak envelope power of AM must be 3 dB less than maximum output power below 250 MHz.

13

Specifications for Analog Modulation

Wideband AM

Rates [1 dB bandwidth] ¹	
ALC on	(400 Hz to 40 MHz)
ALC off	(DC to 40 MHz)
Wideband AM using external 1 input only	
Sensitivity	0.5 V = 100%
Input impedance	50 Ω, nominal

Pulse modulation

On/off ratio ¹	
< 4 GHz	> 80 dB
> 4 GHz	(> 64 dB)
Rise/fall times ¹	
(150 ns)	
Minimum width ¹	
ALC on	(2 μs)
ALC off	(0.4 μs)
Pulse repetition frequency ¹	
ALC on	(10 Hz to 250 kHz)
ALC off	(DC to 1.0 MHz)
Level accuracy ^{1,2} [relative to CW at ≤ 4 dBm standard, ≤ 7.5 dBm Option UNB, ≤ 4.5 dBm Option 506]	
(< ±1 dB)	
Pulse modulation using external inputs	
Input voltage	
RF on	> +0.5 V, nominal
RF off	< +0.5 V, nominal
Input impedance	50 Ω, nominal
Internal pulse generator	
Square wave rate	0.1 Hz to 20 kHz
Pulse	
Period	8 μs to 30 seconds
Width	4 μs to 30 seconds
Resolution	2 μs

- Parentheses denote typical performance.
- With ALC off, specifications apply after the execution of power search. With ALC on, specifications apply for pulse repetition rates ≤ 10 kHz and pulse widths ≥ 5 μs.

14

Specifications for Analog Modulation

Internal modulation source

Provides modulating signal for FM, AM, pulse and phase modulation signals, and provides LF output source for basic function generator capability.

Waveforms	Sine, square, ramp, triangle, pulse, noise	
Rates range		
Sine	0.1 Hz to 100 kHz	
Square, ramp, triangle	0.1 Hz to 20 kHz	
Resolution	0.1 Hz	
Frequency accuracy	Same as RF reference source	
Swept sine mode [frequency, phase continuous]		
Operating modes	Triggered or continuous sweeps	
Frequency range	0.1 Hz to 100 kHz	
Sweep time	1 ms to 65 sec	
Resolution	1 ms	
Dual sine wave mode		
Frequency range	0.1 Hz to 100 kHz	
Amplitude ratio	0 to 100%	
Amplitude ratio resolution	0.1%	
LF audio out mode		
Amplitude	0 to 2.5 V _{peak} into 50 Ω	
Output impedance	50 Ω, nominal	
Noise		
Noise with adjustable amplitude generated as a peak-to-peak value (RMS value is approximately 80% of the displayed value)		

External modulation inputs

Modulation types	
Ext 1	FM, ΦM, AM, pulse, and burst envelope
Ext 2	FM, ΦM, AM, and pulse
LO/HI annunciator [100 Hz to 10 MHz BW, AC coupled inputs only]. Activated when input level error exceeds 3% [nominal].	

15

Specifications for Analog Modulation

External burst envelope

Input voltage	
RF on	0 V
RF off	-1.0 V
Linear control range	0 to -1 V
On/off ratio ¹	
Condition: V _{in} below -1.05 V	
< 4 GHz	> 75 dB
> 4 GHz	(> 64 dB)
Rise/fall time ¹	
Condition: With rectangular input (< 2 μs)	
Minimum burst repetition frequency ¹	
ALC on	(10 Hz)
ALC off	DC
Input port	External 1
Input impedance	50 Ω, nominal

Composite modulation

AM, FM, and ΦM each consist of two modulation paths which are summed internally for composite modulation. The modulation sources may be any two of the following: Internal, External 1, External 2.

Simultaneous modulation


Multiple modulation types may be simultaneously enabled. For example, W-CDMA, AM, and FM can run concurrently and all will affect the output RF. This is useful for simulating signal impairments. There are some exceptions: FM and AM cannot be combined; AM and Burst envelope cannot be combined; Wideband AM and internal I/Q cannot be combined. Two modulation types cannot be generated simultaneously by the same modulation source.

- Parentheses denote typical performance.

16

Specifications for I/Q Characteristics

I/Q modulation bandwidth

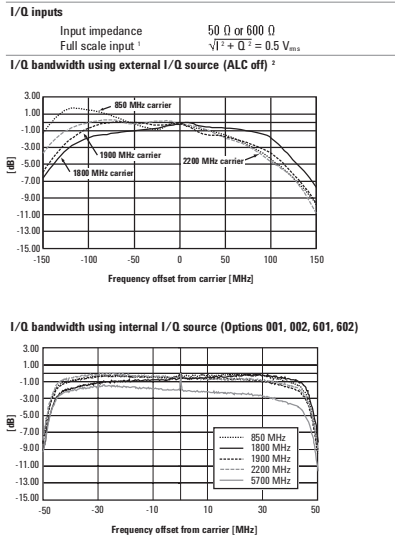

1. The optimum I/Q input level is $\sqrt{I^2 + Q^2} = 0.5 V_{rms}$. I/Q drive level affects EVM, origin offset, spectral regrowth, and noise floor. Typically, level accuracy with ALC on will be maintained with drive levels between 0.25 and 1.0 V_{rms} .

2. Parentheses denote typical performance.

17

Specifications for I/Q Characteristics

I/Q adjustments

Source	Parameter	Range
I/Q baseband inputs	Impedance	50 or 600 Ω
	I offset (100 Ω only) Q offset (100 Ω only) 20 Hz to 100 kHz	±5 V ±5 V (5 Hz to 0.9 MHz)
I/Q baseband outputs	I/Q offset adjustment	±3 V
	I/Q offset resolution	1 mV
	I/Q gain balance	±4 dB
	I/Q attenuation	0 to 40 dB
RF output	I/Q low pass filter	40 MHz, through
	I/Q offset adjustment I/Q gain balance I/Q attenuation I/Q quad skew [≤ 3.3 GHz] [> 3.3 GHz]	±50% ±4 dB 0 to 40 dB ±10° ±5°
I/Q low pass filter	I/Q low pass filter	2.1 MHz, 40 MHz, through
	I/Q baseband outputs ¹	I, I, Q, Q
Differential outputs	I, Q	
Single ended	I, Q	
Frequency range	DC to 40 MHz [with sinewave]	
Output voltage into 50 Ω	(1.5 V _{P-P}) [with sinewave]	
Output impedance	50 Ω, nominal	
Channels	2 [I and Q]	
Resolution	16 bits [1/65,536]	
Arbitrary waveform memory		
Maximum playback capacity	8 megasamples (MSa)/channel [Option 601] 64 MSa/channel [Option 602]	
Maximum storage capacity	1.2 GSa [Option 005] 2.8 MSa [Standard]	
Waveform segments		
Segment length	60 samples to 8 or 64 MSa	
Maximum number of segments	1,024 [8 MSa volatile memory] 8,192 [64 MSa volatile memory]	
Minimum memory allocation	256 samples or 1 KB blocks	
Waveform sequences		
Maximum total number of segment files		
stored in the non-volatile file system	16,384	
Sequencing	Continuously repeating	
Maximum number of sequences	16,384 [shared with number of segments]	
Maximum segments/sequence	32,768 [including nested segments]	
Maximum segment repetitions	65,536	

Baseband generator
[arbitrary waveform mode]
[Option 601 or 602]

1. Parentheses denote typical performance.

18

Specifications for I/Q Characteristics

Clock	
Sample rate	1 Hz to 100 MHz
Resolution	0.001 Hz
Accuracy	Same as timebase +2 ⁴² [in non-integer applications]
Baseband filters	
40 MHz	used for spur reduction
2.1 MHz	used for ACPR reduction
Through	used for maximum bandwidth
Reconstruction filter: [fixed]	
50 MHz	[used for all symbol rates]
Baseband spectral purity ¹ [full scale sinewave]	
Harmonic distortion	
100 kHz to 2 MHz	(< -85 dBc)
Phase noise	(< -127 dBc/Hz) [baseband output of 10 MHz sinewave at 20 kHz offset]
IM performance	(< -74 dB)
[two sinewaves at 950 kHz and 1050 kHz at baseband]	
Triggers	
Types	Continuous, single, gated, segment advance
Source	Trigger key, external, remote [LAN, GPIB, RS-232]
External polarity	Negative, positive
External delay time	10 ns to 40 sec plus latency
External delay resolution	10 ns
Trigger accuracy	±1/sample rate
Trigger latency	See users guide
Markers	
[Markers are defined in a segment during the waveform generation process, or from the ESG front panel. A marker can also be tied to the RF blanking feature of the ESG.]	
Marker polarity	Negative, positive
Number of markers	4
Multicarrier	
Number of carriers	Up to 100 [limited by a max bandwidth of 80 MHz depending on symbol rate and modulation type]
Frequency offset [per carrier]	-40 MHz to +40 MHz
Power offset [per carrier]	0 dB to -40 dB
Modulation	
PSK	BPSK, QPSK, OQPSK, n/4DQPSK, 8PSK, 16PSK, D8PSK
QAM	4, 16, 32, 64, 128, 256
FSK	Selectable: 2, 4, 8, 16
MSK	
ASK	
Data	
	Random ONLY
Baseband filters	
Number of tones	2 to 64, with selectable on/off state per tone
Frequency spacing	100 Hz to 80 MHz
Phase [per tone]	Fixed or random

1. Parentheses denote typical performance.

19

Specifications for I/Q Characteristics

Baseband generator
[real-time mode]
[Option 601 or 602]

Basic modulation types [custom format]	
PSK	BPSK, QPSK, OQPSK, n/4DQPSK, 8PSK, 16PSK, D8PSK
MSK	User-defined phase offset from 0 to 100°
ASK	User-defined depth from 0.001 to 100%
QAM	4, 16, 32, 64, 128, 256
FSK	Selectable: 2, 4, 8, 16 level symmetric, C4FM User defined: Custom map of up to 16 deviation levels
	Symbol rate Maximum deviation
	< 5 MHz 4 times symbol rate
	> 5 MHz 20 MHz
	< 50 MHz
	Resolution: 0.1 Hz
I/Q	Custom map of 256 unique values
FIR filter	
Selectable	Nyquist, root Nyquist, Gaussian, rectangular, Apco 25 a: 0 to 1, B, T: 0.1 to 1
Custom FIR	16-bit resolution, up to 64 symbols long, automatically resampled to 1024 coefficients [max] > 32 to 64 symbol filter: symbol rate ≤ 12.5 MHz > 16 to 32 symbol filter: symbol rate ≤ 25 MHz Internal filters switch to 16 tap when symbol rate is between 25 and 50 MHz
Symbol rate	
	For external serial data, symbol rate is adjustable from 1000 symbols/sec to a maximum symbol rate of 50 Mbits/sec #bits/symbol
	For internally generated data, symbol rate is adjustable from 1000 symbols/sec to 50 Msymbols/sec, and a maximum of 8 bits per symbol. Modulation quality may be degraded at high symbol rates. See data types for memory requirements.
Baseband reference frequency	
Input	Data clock can be phase locked to an external reference. 13 MHz for GSM, 250 kHz to 100 MHz in W-CDMA and cdma2000 [™] ECL, CMOS, TTL compatible, 50 Ω AC coupled
Frame trigger delay control	
Range	0 to 1,048,575 bits
Resolution	1 bit

1. Performance below 1 MHz not specified.

2. When used, this baseband reference is independent of the 10 MHz RF reference.

20

Specifications for I/Q Characteristics

Data types	
<i>Internally generated data</i>	
Pseudo-random patterns	PN9, PN11, PN15, PN20, PN23 ¹
Repeating sequence	Any 4-bit sequence Other fixed patterns
<i>Direct-pattern RAM [PRAM]</i>	
Max size	Option 601 Option 602
	8 Mbits 64 Mbits
	[each bit uses an entire sample space]
Use	Non-standard framing
<i>Usar file</i>	
Max size	Option 601 Option 602
	800 kB 6.4 MB
Use	Continuous modulation or internally generated TDMA standard
<i>Externally generated data</i>	
Type	Serial data
Inputs	Data, bit clock, symbol sync
Inputs	Accepts data rates $\pm 5\%$ of specified data rate
Internal burst shape control	
Varies with standards and bit rates	
Rise/fall time range	Up to 30 bits
Rise/fall delay range	0 to 63.5 bits

Specifications for Signal Personality Characteristics

3GPP W-CDMA
[arbitrary waveform mode]¹
[Option 400]

Error vector magnitude ²	[1.8 GHz < f _c < 2.2 GHz, root Nyquist filters, 40 MHz baseband filter, EVM optimization mode 3.84 Mcps chip rate, ≤ 4 dBm, ≤ 7 dBm with Option UNB] 1 DPCH $\leq 1.8\%$, $\leq 0.9\%$
Level accuracy [relative to CW at 800, 900, 1800, 1900, 2200 MHz] ²	≤ 2.5 dBm standard, 7.5 dBm for Option UNB, and 4.5 dBm for Option 506] ± 0.7 dB (± 0.35 dB)
Adjacent channel leakage ratio ²	[1.8 GHz < f _c < 2.2 GHz, default W-CDMA filters, 3.84 Mcps chip rate, ≤ 0 dBm Option UNB, ≤ -2 dBm Option 506, ≤ -3 dBm standard in Optimize ADJ mode] 1 DPCH Test Model 1 -65 dBc (-67 dBc) +64 DPCH
Alternate channel leakage ratio ²	[1.8 GHz < f _c < 2.2 GHz, default W-CDMA filters, 3.84 Mcps chip rate, ≤ 2.5 dBm standard, ≤ 4.5 dBm Option 506, ≤ 7.5 dBm Option UNB, in Optimize ALT mode] 1 DPCH Test Model 1 -71 dBc (-75 dBc) +64 DPCH

- PN23 is too large for Option 601 for modulation formats with 3, 5, 6, or 7 bits/symbol if the bit rate is greater than 50 Mbit/sec.
- Parentheses denote typical performance.
- Valid for 23° $\pm 5^\circ$ C.

21

Specifications for Signal Personality Characteristics

IS-95 CDMA
[arbitrary waveform mode]¹
[Option 401]

Frequencies/offsets	0.885 to 1.25 MHz		1.25 to 1.98 MHz		1.98 to 5 MHz	
	Standard	Option 506	Standard	Option 506	Standard	Option 506
<i>Reverse</i>						
30 – 200 MHz	(-74)	(-74)	(-77)	(-77)	(-77)	(-77)
700 – 1000 MHz	(-73 (-77))	(-73 (-77))	(-81)	(-81)	(-85)	(-85)
>1000 – 2000 MHz	(-76 (-79))	(-76 (-79))	(-83)	(-83)	(-85)	(-85)
<i>9/64 channels</i>						
30 – 200 MHz	(-70)	(-70)	(-73)	(-73)	(-76)	(-76)
700 – 1000 MHz	(-73 (-76))	(-73 (-76))	(-79)	(-79)	(-82)	(-82)
>1000 – 2000 MHz	(-72 (-76))	(-71 (-76))	(-79)	(-79)	(-82)	(-82)

Rho ≤ 4 dBm standard and Option 506, or ≤ 7 dBm Option UNB, IS-95 filter, ≤ 2 GHz) $\rho \geq 0.9992$ (.9998)

cdma2000
[arbitrary waveform mode]
[Option 401]

Frequencies/offsets	Offsets from center carrier		
	2.135 to 2.50 MHz	2.50 to 3.23 MHz	3.23 to 10 MHz
<i>Forward 9 channel, SR3/multi-carrier</i> ^{1,3}			
30 – 200 MHz	(-70)	(-69)	(-69)
700 – 1000 MHz	(-75)	(-74)	(-77)
>1000 – 2000 MHz	(-75)	(-74)	(-77)
<i>Reverse 5 channel, SR3/DS</i> ^{1,3}			
30 – 200 MHz	(-78)	(-78)	(-75)
700 – 1000 MHz	(-82)	(-83)	(-85)
>1000 – 2000 MHz	(-82)	(-83)	(-85)

Error vector magnitude
[≤ 4 dBm standard and Option 506, ≤ 7 dBm for Option UNB]
[825 to 2100 MHz, SR3 pilot, IS-95 filter, which is optimized for EVM]¹
EVM $\leq 2.1\%$, $\leq 1.5\%$

- Performance below 1 MHz not specified.
- When used, this baseband reference is independent of the 10 MHz RF reference.

22

Specifications for Signal Personality Characteristics

AWGN
[real-time mode]
[Option 403]

Noise bandwidth	50 kHz to 80 MHz
Crest factor [output power set at least 16 dB below maximum power]	> 16 dB
Randomness	89 bit pseudo-random generation, repetition period 3 x 10 ⁹ years
Carrier to noise ratio	Magnitude error ≤ 0.2 dB at baseband I/Q outputs

AWGN
[arbitrary waveform mode]
[Option 403]

Noise bandwidth	50 kHz to 15 MHz
Randomness	14 to 20 bit pseudo-random waveform with fixed or random seed
Repetition period	0.4 ms to 2 s (dependent on noise bandwidth and waveform length)

- All values typical.

23

Specifications for Signal Personality Characteristics

Custom modulation
[real-time mode]

Custom digitally modulated signals [real-time mode] ^{1,2}					
Modulation	QPSK	n/4QPSK	16QAM	2FSK	GMSK
Filter	Root Nyquist			Gaussian	
Filter factor (a or B _T)	0.25	0.25	0.25	0.5	0.5
Modulation index	N/A	N/A	N/A	0.5	N/A
Symbol rate [Msym/s]	4	4	4	1	1
Error vector magnitude ^{3,4} [% rms]					
f _c = 1 GHz	1.1 (0.7)	1.1 (0.7)	1.0 (0.6)	1.3 (0.8)	0.4 (0.2)
f _c = 2 GHz	1.2 (0.8)	1.2 (0.8)	1.0 (0.6)	1.4 (0.9)	0.5 (0.3)
f _c = 3 GHz	1.6 (1.0)	1.6 (1.0)	1.5 (0.9)	1.8 (1.0)	0.7 (0.4)
f _c = 4 GHz	2.5 (1.4)	2.5 (1.3)	3.3 (1.9)	3.3 (2.0)	1.0 (0.6)
f _c = 5 GHz	1.5 (1.0)	1.5 (1.0)	1.2 (0.8)	1.8 (1.2)	0.6 (0.3)
f _c = 6 GHz	1.8 (1.2)	1.8 (1.2)	2.0 (1.4)	2.0 (1.4)	0.8 (0.4)
Shift error ^{3,4} [% rms]					
Global phase error ^{3,4} [degrees rms]					

Internal modulation using real-time TDMA personalities [Option 402]²

	NADC		PDC		PHS		TETRA ⁴		DECT		GSM DCS,		EDGE	
	PGS													
Error vector magnitude ^{1,4} [% rms]	1.2 (0.7)		1.2 (0.7)		0.9 (0.5)		0.8 (0.5)						1.2 (0.6)	
Low EVM mode	(1.2)		(0.9)		(0.8)		(1.0)							
Low ACP mode														
Global phase error ²	N/A		N/A		N/A		N/A		N/A		0.6 (0.3)		1.9 (1.0)	
rms														
pk														
Deviation accuracy ² [kHz, rms]	N/A		N/A		N/A		N/A		2.5 (1.1)		N/A		N/A	
Channel spacing [kHz]	30		25		300		25		1728		200		200	
Adjacent channel power ² [ACP] (Low ACP mode, dBc)	Cont.	Burst	Cont.	Burst	Cont.	Burst	Cont.	Burst	N/A		Cont.	Burst	N/A	
at adjacent channel ²	(-35)	(-34)	-	-	-	-	(-70)	(-63)			(-37)	(-37)		
at 1st alternate channel ²	(-80)	(-79)	(-74)	(-74)	(-81)	(-76)	(-81)	(-80)			(-71)	(-70)		
at 2nd alternate channel ²	(-84)	(-83)	-	-	(-82)	(-79)	(-82)	(-82)			(-84)	(-81)		
at 3rd alternate channel ²	(-85)	(-84)	(-82)	(-82)	-	-	(-83)	(-83)			(-85)	(-81)		
Support burst type	Custom up/down TCH		Custom up/down TCH up/Vox		Custom TCH, sync		Custom up control 1 & 2 up normal, down normal		Custom B 1 & 2 traffic B, low capacity		Custom normal, Fcorr, sync, dummy, access			
Scramble burst type					Yes		Yes							

- This level of performance can be attained using the external I/Q inputs, provided the quality of the baseband signal meets or exceeds that of the ESG baseband generator.
- Parentheses denote typical performance.
- Specifications apply at power levels $\leq +4$ dBm [$\leq +5$ dBm for Option 506, and $\leq +8$ dBm for Option UNB] with default scale factor of I/Q outputs.
- Valid after executing I/Q calibration and maintained within $\pm 0.5^\circ$ C of the calibration temperature.
- ACP for TETRA is measured over a 25 kHz bandwidth, with an 18 kHz root raised cosine filter. Low ACP mode is valid at power levels ≤ -1 dBm [≤ 1 dBm for Option 506 and $\leq +4$ dBm for Option UNB].
- Specifications apply for the symbol rates, filter factors B or B_T and default scaling factor specified for each standard, and at power levels $\leq +7$ dBm [$\leq +10$ dBm for Option UNB].
- The "channel spacing" determines the offset size of the adjacent and alternate channels: Adjacent channel offset = 1 x channel spacing, 1st alternate channel = 2 x channel spacing, 2nd alternate channel = 3 x channel spacing, etc.

24

Specifications for Signal Personality Characteristics

GSM/GPRS
[real-time mode]
[Option 402]

Multiframe output data generation	
<i>Coding scheme</i>	Full-rate speech [TCH/FS] CS-1, CS-4
<i>Data</i>	PN9 or PN15 The selected data sequence is coded continuously across the RLC data block as per ETSI TS 100 909, 3GPP TS 05.03, V8.9.0, 2000-11 [release 1999] An independent version of the selected data sequence is coded across the MAC header.
<i>Frame structure</i>	26-frame multi-frame structure as per ETSI GSM, 05.01 version 6.1.1 [1998-07]. [Coding is done on frames 0-11, 13-24, of the multi-frame. Frame 25 is idle [RF blanked].]
<i>Adjacent timeslots</i>	
<i>Data</i>	PN9, PN15 coded as per ETSI TS 100 909, 3GPP TS 05.03, V8.9.0, 2000-11 [release 1999].
<i>Frame structure</i>	26-frame multi-frame structure as per ETSI GSM, 5.01 version 6.1.1 [1998-07].
Alternate time slot power level control [Valid for standard attenuator only. Not applicable to Option UNB or Option 506] Amplitude is settled within 0.5 dB in 20 μ s, +4 to -136 dBm at 23 \pm 5 $^{\circ}$ C	

25

Specifications for Signal Personality Characteristics

EDGE/EGPRS
[real-time mode]
[Option 402]

Multiframe output data generation	
<i>Coding scheme</i>	MCS-1: uplink and downlink, MCS-5: uplink and downlink, MCS-9: uplink and downlink, E-TCH/F43.2
<i>Data</i>	PN9 or PN15 The selected data sequence is fully coded continuously across the RLC data blocks according to MCS-1, MCS-5, MCS-9 or E-TCH/F43.2. An independent version of the selected data sequence is coded across the unused RLC/MAC header fields [The CPS header field is as defined in GSM 04.60 V8.50].
<i>Frame structure</i>	52-frame multi-frame structure for EDGE/EGPRS channel as per ETSI TS 100 909, 3GPP TS 05.03, V8.9.0, 2000-11 [release 1999]. [Coding is done on frames 0-11, 13-24, 26-37, 39-50 on a 52 PDCH multi-frame. Frame 25 and 51 are idle [RF blanked].]
<i>Adjacent timeslots</i>	
<i>Data</i>	Coded MCS-1, MCS-5 or MCS-9 with continuous PN9 or PN15 sequence data payload. Uncoded PN9, PN15 Note: Maximum of 4 timeslots can be turned on with EDGE/EGPRS multi-frame coded data.
<i>Frame structure</i>	EDGE/EGPRS PDCH multi-frame. Repeating EDGE frame.

Bit error rate [BER] analyzer
[Option UN7]

Clock rate	100 Hz to 60 MHz
Supported data patterns	PN9, 11, 15, 20, 23
Resolution	10 Digits
Bit sequence length	100 bits to 4,294 Gbits after synchronization
Features	Input clock phase adjustment and gate delay Adjustable input threshold Hi/lo threshold selectable from 0.7 V [TTL], 1.4 V [TTL], 1.65 V [CMOS 3.3], 2.5 V [CMOS 5.0] Direct measurement triggering Data and reference signal outputs Real-time display Bit count Error-bit-count Bit error rate Pass/fail indication Valid data and clock detection Automatic re-synchronization Special pattern ignore

26

General Characteristics

Operating characteristics

Power requirement	90 to 254 V; 50/60/400 Hz nominal; 200 W maximum	
Operating temperature range ¹	0 to 55 $^{\circ}$ C	
Storage temperature range	-40 to 71 $^{\circ}$ C	
Shock and vibration	Meets MIL-STD-28800E Type III, Class 3	
Storage registers	Memory is shared by instrument states, user data files, non-volatile waveforms, sweep list files and waveform sequences. There is 14 MB of flash memory standard in the ESG. With Option 005, there is 6 GB of storage. Depending on available memory, a maximum of 1000 instrument states can be saved.	
Weight	< 16 kg [35 lb.] net, < 23 kg [50 lb.] shipping	
Dimensions	133 mm H x 426 mm W x 432 mm D [5.25 in H x 16.8 in W x 1.7 in D]	
Remote programming interface	GPIB [IEEE-488.2-1987] with listen and talk, RS-232, LAN [10BaseT].	
Control languages ²	SCPI version 1996.0, also compatible with 8656B and 8657A/B/C/D/J1 mnemonics.	
Functions controlled	All front panel functions except power switch and knob.	
ISO compliant	The E4438C ESG is manufactured in an ISO-9001 registered facility in concurrence with Agilent Technologies commitment to quality.	
Reverse power protection ³	<i>Options 501-504</i>	<i>Option 506</i>
250 kHz to 2 GHz	47 dBm (50 W)	30 dBm (1 W)
> 2 to 4 GHz	44 dBm (25 W)	30 dBm (1 W)
> 4 to 6 GHz	N/A	30 dBm (1 W)
Max DC voltage	50 V	
SWR ⁴	<i>Options 501-504</i>	<i>Options 501-504 with Option UNB</i>
250 kHz to 2.2 GHz	< 1.5:1	< 1.8:1
> 2.2 GHz to 3 GHz	< 1.4:1	< 1.4:1
> 3 GHz to 4 GHz	< 1.5:1	< 1.7:1
> 4 GHz to 6 GHz	N/A	< 1.8:1
Output impedance	50 Ω nominal	

1. Save and recall of user files and instrument states from non-volatile storage is guaranteed only over the range 0 to 40 $^{\circ}$ C.
2. ESG series does not implement 8657A/B "Standby" or "On" [R0 or R1, respectively] mnemonics.
3. Options 501-504 are protected to levels indicated, however, the reverse power protection circuit will trip at nominally 30 dBm (1 W).
4. Parenthesis denote typical performance.

27

General Characteristics

Accessories

Inputs and outputs

All front panel connectors can be moved to rear with Option 1EM.

Transits case		Part number 9211-1296
10 MHz input	Accepts a 1, 2, 5, or 10 MHz \pm 0.2 ppm [high-stability timebase] reference signal for operation with an external timebase. Nominal input level -3.5 to +20 dBm, impedance 50 Ω . [BNC, rear panel]	
10 MHz output	Outputs the 10 MHz reference signal. Level nominally +3.9 dBm \pm 2 dB. Nominal output impedance 50 Ω . [BNC, rear panel]	
Alternate power input	Accepts CMOS ¹ signal for synchronization of external data and alternate power signal timing. The damage levels are -0.5 to +5.5 V. [Auxiliary I/O connector, rear panel]	
Baseband generator reference input	Accepts 0 to +20 dBm sinewave, or TTL square-wave, to use as reference clock for the baseband generator. Phase locks the internal data generator to the external reference; the RF frequency is still locked to the 10 MHz reference. Rate is 250 kHz to 100 MHz, 50 Ω nominal, AC coupled. [BNC, rear panel] [SMB with Option 1EM]	
Burst gate input	The burst gate in connector accepts a CMOS ¹ signal for gating burst power in digital modulation applications. The burst gating is used when you are externally supplying data and clock information. The input signal must be synchronized with the external data input that will be output during the burst. The burst power envelope and modulated data are internally delayed and re-synchronized. The input signal must be CMOS high for normal burst RF power or CW RF output power and CMOS low for RF off. The damage levels are -0.5 to +5.5 V.	
Coherent carrier output ²	This female BNC connector is provided on signal generators with Option 601 or 602. On signal generators with Option 1EM, this input is relocated to a rear panel SMB connector. With Option 401, this connector is used for the even second synchronization input. Outputs RF modulated with FM or QM, but not IQ, pulse or AM. Nominal power -2 dBm \pm 5 dB. Nominal impedance 50 ohms. Frequency range from > 250 MHz to 4 GHz. For RF carriers below this range, output frequency = 1 GHz - frequency of RF output. Damage levels 20 VDC and 13 dBm reverse RF power. [SMA, rear panel]	

1. Rear panel inputs and outputs are 3.3 V CMOS, unless indicated otherwise. CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.
2. Coherent carrier is modulated by FM or FM when enabled.

28

General Characteristics

Data clock input	The CMOS compatible data clock connector accepts an externally supplied data-clock input for digital modulation applications. The expected input is a bit clock signal where the falling edge is used to clock the data and symbol sync signals. The maximum clock rate is 50 MHz. The damage levels are -0.5 to +5.5 V. This female BNC connector is provided on signal generators with Option 601 or 602. On signal generators with Option 1EM, this input is relocated to a rear panel SMB connector.
Data clock output	Relays a CMOS 1 bit clock signal for synchronizing serial data. [Auxiliary I/O connector, rear panel]
Data input	The CMOS compatible data connector accepts an externally supplied data input for digital modulation applications. CMOS high is equivalent to a data 1 and a CMOS low is equivalent to a data 0. The maximum data rate is 50 Mb/s. The data must be valid on the data clock falling edges [normal mode] or the symbol sync falling edges [symbol mode]. The damage levels are -0.5 to +5.5 V. This female BNC connector is provided on signal generators with Option 601 or 602. On signal generators with Option 1EM, this input is relocated to a rear panel SMB connector.
Data output	Outputs serial data from the internal data generator or the externally supplied signal at the data input. CMOS 1 signal. [Auxiliary I/O connector, rear panel]
Event 1 output	In real-time mode, outputs pattern or frame synchronization pulse for triggering or gating external equipment. May be set to start at the beginning of a pattern, frame, or timeslot and is adjustable to within ± one timeslot with one bit resolution. In arbitrary waveform mode, this connector outputs the timing signal generated by marker 1. [BNC, rear panel] [SMB with Option 1EM]
Event 2 output	In real-time mode, outputs data enabled signal for gating external equipment. Applicable when external data is clocked into internally generated timeslots. Data is enabled when signal is low. In arbitrary waveform mode, this connector outputs the timing signal generated by marker 2. [BNC, rear panel] [SMB with Option 1EM]
Event 3 output	In arbitrary waveform mode, this connector outputs the timing signal generated by marker 3. [Auxiliary I/O connector, rear panel]
Event 4 output	In arbitrary waveform mode, this connector outputs the timing signal generated by marker 4. [Auxiliary I/O connector, rear panel]

1. Rear panel inputs and outputs are 3.3V CMOS, unless indicated otherwise. CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.

29

General Characteristics

External 1 input	This BNC input connector accepts a ±1 V _{pp} signal for AM, FM, pulse, burst, and phase modulation. For all these modulations, ±1 V _{pp} produces the indicated deviation or depth. When ac-coupled inputs are selected for AM, FM, or phase modulation and the peak input voltage differs from 1 V _{pp} by more than 3%, the hi/lo annunciator light on the display. The input impedance is 50 Ω and the damage levels are 5 V _{pp} and 10 V _{pp} . If you configure your signal generator with Option 1EM, this input is relocated to a female SMB connector on the rear panel.
External 2 input	This BNC input connector accepts a ±1 V _{pp} signal for AM, FM, phase modulation, and pulse modulation. With AM, FM, or phase modulation, ±1 V _{pp} produces the indicated deviation or depth. With pulse modulation, +1 V is on and 0 V is off. When ac-coupled inputs are selected for AM, FM, or phase modulation, and the peak voltage differs from 1 V _{pp} by more than 3%, the hi/lo annunciator light on the display. The input impedance is 50 Ω and the damage levels are 5 V _{pp} and 10 V _{pp} . If you configure your signal generator with Option 1EM, this input is relocated to a female SMB connector on the rear panel.
 GPIB	Allows communication with compatible devices. [rear panel]
I input	Accepts an I input either for I/Q modulation or for wideband AM. Nominal input impedance 50 or 600 Ω. Damage levels are 1 V _{pp} and 10 V _{pp} . [BNC, front panel] [SMB with Option 1EM]
I out and Q out 1	The I out and Q out connectors output the analog components of I/Q modulation from the internal baseband generator. The nominal output impedances of these connectors are 50 Ω, DC-coupled. The damage levels are > +35 V and < -35 V. The output signal levels into a 50 Ω load are as follows: <ul style="list-style-type: none"> • (0.5 V_{pp}), corresponds to one unit length of the I/Q vector. • (0.7 V_{pp}), for peaks for p/4 DQPSK. • (1.6 V_{pp}) maximum [Options 601, 602, 001, 002 only]. These female BNC connectors are provided on signal generators with Option 601 or 602. On signal generators with Option 1EM, these inputs are relocated to rear panel SMB connectors.

1. Parentheses denote typical performance.

30

General Characteristics

I and Q out	I and Q are used in conjunction with I and Q to provide a balanced baseband stimulus. Balanced signals are signals present in two separate conductors that are symmetrical about the common mode offset, and are opposite in polarity (180 degrees out of phase). These female BNC connectors are provided only on signal generators with Option 601 or 602. If you configure your signal generator with Option 1EM, these inputs are relocated to rear panel SMB connectors.
LF output	Outputs the internally-generated LF source. Outputs 0 to 2.5 V _{pp} into 50 Ω, or 0 to 5 V _{pp} into high impedance. [BNC, front panel] [SMB with Option 1EM]
Pattern trigger input	Accepts CMOS 1 signal to trigger internal pattern or frame generator to start single pattern output. Minimum pulse width 100 ns. The damage levels are -0.5 to +5.5 V. [BNC, rear panel] [SMB with Option 1EM]
Q input	Accepts a Q input for I/Q modulation. Nominal input impedance 50 or 600 ohms. Damage levels are 1 V _{pp} and 10 V _{pp} . [BNC, front panel] [SMB with Option 1EM]
RF output	Nominal output impedance 50 Ω. [type-N female, front panel]
Sweep output	Generates output voltage, 0 to +10 V when signal generator is sweeping. Output impedance < 1 Ω, can drive 2000 Ω. [BNC, rear panel] [SMB with Option 1EM]
Symbol sync input	The CMOS compatible symbol sync connector accepts an externally supplied symbol sync for digital modulation applications. The expected input is a symbol clock signal. It may be used in two modes: When used as a symbol sync in conjunction with a data clock, the signal must be high during the first data bit of the symbol. The signal must be valid during the falling edge of the data clock signal and may be a single pulse or continuous. When the symbol sync itself is used as the [symbol] clock, the falling edge is used to clock the data signal. The maximum clock rate is 50 MHz. The damage levels are -0.5 to +5.5 V. [BNC, front panel] This female BNC connector is provided on signal generators with Option 601 or 602. On signal generators with Option 1EM, this input is relocated to a rear panel SMB connector.
Symbol sync output	Outputs CMOS 1 symbol clock for symbol synchronization, one data clock period wide. [Auxiliary I/O connector, rear panel]
Trigger input	Accepts CMOS 1 signal for triggering point-to-point in manual sweep mode, or to trigger start of LF sweep. The damage levels are -0.5 to +5.5 V. [BNC, rear panel]
Trigger output	Outputs a TTL signal: high at start of dwell, or when waiting for point trigger in manual sweep mode; low when dwell is over or point trigger is received, high or low 2 μs pulse at start of LF sweep. [BNC, rear panel]

1. Rear panel inputs and outputs are 3.3V CMOS, unless indicated otherwise. CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.

31

General Characteristics

With Option UN7	Accepts CMOS 1 or 75 Ω input. Polarity is selected.
BER data, BER clock	Clock duty and inputs cycle is 30% to 70%. [SMB, rear panel]
BER gate	
BER sync loss output	Outputs a CMOS 1 signal that is low when sync is lost. Valid only when measure end signal is high. [Auxiliary I/O connector, rear panel]
BER no data output	Outputs a CMOS 1 signal that is low when no data is detected. Valid only when measure end is high. [Auxiliary I/O connector, rear panel]
BER error-bit output	Outputs CMOS 1 signal when error bit is detected. Pulse width matches the input clock. [Auxiliary I/O connector, rear panel]
BER test result output	Outputs a CMOS 1 signal that is high for fail and low for pass. Valid only on measure end signal falling edge. [Auxiliary I/O connector, rear panel]
BER measure end output	Outputs a CMOS 1 signal that is high during measurement. Trigger events are ignored while high. [Auxiliary I/O connector, rear panel]
BER measure trigger	Accepts CMOS 1 signal to initiate BER measurement. Polarity is selectable; available when trigger source is selected as "AUX I/O". Damage levels are The damage levels are -0.5 to +5.5 V. [Auxiliary I/O connector, rear panel]
With Option 300	Accepts a 321.4 MHz IF signal for GSM/EDGE/loopback testing. Input amplitude range -7 dBm to -22 dBm. Nominal input impedance 50 Ω. [SMB, rear panel]
LAN connector	LAN communication is supported by the signal generator via the LAN connector. It is functionally equivalent to the GPIB connector. The LAN connector enables the signal generator to be remotely programmed by a LAN-connected computer. The distance between a computer and the signal generator is limited to 100 meters [10BaseT]. For more information about the LAN, refer to the <i>Getting Started</i> chapter in the <i>Programming Guide</i> . Data transfer speeds 2
LAN [FTP]	file transfer to volatile memory (700 KB/sec) to hard drive (500 KB/sec)
LAN [SCP]	command transfer to volatile memory (146 KB/sec) to hard drive (128 KB/sec)
Internal file transfer from hard drive to volatile memory	(1280 KB/sec)

1. Rear panel inputs and outputs are 3.3V CMOS, unless indicated otherwise. CMOS inputs will accept 5 V CMOS, 3 V CMOS, or TTL voltage levels.


2. Parentheses denote typical performance.

32

RS-232 connector

This male DB-9 connector is an RS-232 serial port that can be used for controlling the signal generator remotely. It is functionally equivalent to the GPIB connector. The following table shows the description of the pinouts. The pin configuration is shown below.


Pin number	Signal description	Signal name
1	No connection	
2	Receive data	RECV
3	Transmit data	XMT
4	+5 V	
5	Ground, 0 V	
6	No connection	
7	Request to send	RTS
8	Clear to send	CTS
9	No connection	



View looking into rear panel connector

Auxiliary I/O connector

This male DB-9 connector is an RS-232 serial port that can be used for controlling the signal generator remotely. It is functionally equivalent to the GPIB connector. The following table shows the description of the pinouts. The pin configuration is shown below.

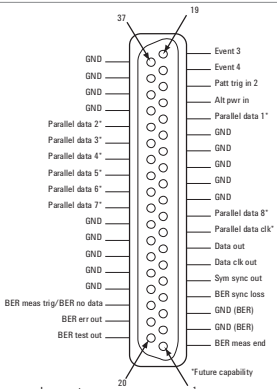

View looking into rear panel connector

Mating connector 37 pin male D-subminiature, available from AMP, 3M, others.

33

Performance enhancement options

- 501 1 GHz frequency range
- 502 2 GHz frequency range
- 503 3 GHz frequency range
- 504 4 GHz frequency range
- 506 6 GHz frequency range [requires option UNJ, includes mechanical attenuator]
- UNB High output power with mechanical attenuator [optional with 501, 502, 503, 504] [included with 506]
- UNJ Enhanced phase noise performance [includes 1E5]
- 1E5 High stability time base
- 1EM Moves all front panel connectors to rear
- 003 ² Enables ESG digital outputs with N5102A
- 004 ² Enables ESG digital inputs with N5102A
- 601 Internal baseband generator with 8 MSAs and digital bus capability [40 MB] of memory
- 602 Internal baseband generator with 64 MSAs and digital bus capability [320 MB] of memory
- 005 ² 6 GB internal hard drive
- UN7 Internal bit error rate analyzer
- 1CP Rack mount kit with handles
- 1CN Front handle kit

System accessories

Embedded signal creation software ^{3,4}

- E4438C-400 3GPP W-CDMA with HSDPA
- E4438C-401 cdma2000 and IS-95A
- E4438C-402 TDMA (GSM, GPRS, EDGE, EGPRS, DADC, PCD, PHS, TETRA, DECT)
- E4438C-403 calibrated noise
- E4438C-409 GPS
- E4438C-422 scenario generator for GPS

PC-based signal creation software ^{3,4}

- E4438C-221 to 229 waveform license 5-packs
- E4438C-250 to 259 waveform license 50-packs
- E4438C-407 Signal Studio for S-DMB
- E4438C-419 Signal Studio for 3GPP W-CDMA HSPA
- E4438C-SP1 Signal Studio for Jitter Injection
- N7600B Signal Studio for 3GPP W-CDMA FDD
- N7611B Signal Studio for 3GPP2 CDMA
- N7602B Signal Studio for GSM/EDGE
- N7606B Signal Studio for Bluetooth™
- N7611B Signal Studio for Broadcast Radio
- N7612B Signal Studio for TD-SCDMA
- N7613A Signal Studio for 802.16-2004 (WiMAX™)
- N7615B Signal Studio for 802.16 WiMAX
- N7616B Signal Studio for T-DMB
- N7617B Signal Studio for 802.11 WLAN
- N7620A Signal Studio for Pulse Building
- N7621B Signal Studio for Multitone Distortion
- N7622A Signal Studio Toolkit
- N7623B Signal Studio for Digital Video
- N7624B Signal Studio for 3GPP LTE
- N7625B Signal Studio for 3GPP LTE TDD

Baseband products ⁵

- N5102A digital signal interface module
- N5106A PXB baseband generator and channel emulator

1. All options should be ordered using E4438C-xxx, where the xxx represents the option number. For more information, please refer to the configuration guide publication number 5988-4065EN.
 2. Requires either Option 601 or 602 (baseband generator) to function.
 3. Requires Option 001, 002, 601, or 602.
 4. For the latest information visit www.agilent.com/find/signalstudio.
 5. For details visit www.agilent.com/find/basebandstudio and www.agilent.com/find/PXB.

34

Related Literature

Application literature

- 3GPP Long Term Evolution: System Overview, Product Development and Test Challenges, literature number 5989-8139EN, May 2008.
 - BER and Subjective Evaluation for DVB-T/H Receiver Test, literature number 5989-8446EN, May 2008.
 - Typical GPS Receiver Verification Tests Using a GPS Signal Simulator, literature number 5989-8572EN, May 2008.
 - Designing and Testing 3GPP W-CDMA Base Transceiver Stations, Application Note 1355, literature number 5980-1239E, March 2006.
 - MIMO Channel Modeling and Emulation Test Challenges, literature number 5989-8973EN, October 2008.
 - RF Source Basics, a self-paced tutorial (CD-ROM), literature number 5980-2060E, October 2000.
 - Digital Modulation in Communications Systems—An Introduction, Application Note 1298, literature number 5965-7160E, October 2000.
 - Using Vector Modulation Analysis in the Integration, Troubleshooting and Design of Digital Communications Systems, Product Note, literature number 5991-8667E, March 2001.
 - Testing CDMA Base Station Amplifiers, Application Note 1307, literature number 5967-5486E May 2000.
 - Understanding GSM/EDGE Transmitter and Receiver Measurements for Base Transceiver Stations and Their Components, Application Note 1312, literature number 5968-2320E August 2002.
 - Understanding CDMA Measurements for Base Stations and Their Components, Application Note 1311, literature number 5968-0953E, June 2000.
 - Testing and Troubleshooting Digital RF Communications Receiver Designs, Application Note 1314, literature number 5968-3579E, March 2002.
- Additional application literature may be found by going to www.agilent.com/find/signalstudio and selecting the "Library" tab.

Product literature

- E4438C ESG Vector Signal Generator, Brochure, literature number 5988-3935EN.
- E4438C ESG Vector Signal Generator, Configuration Guide, literature number 5988-4065EN.
- Agilent MXG Signal Generator, Brochure, literature number 5989-5074EN.
- Agilent MXG Signal Generator, Configuration Guide, literature number 5989-5465EN.
- Agilent N5182A MXG Vector Signal Generator, Data Sheet, literature number 5989-5261EN.
- Agilent N5106A PXB MIMO Receiver Tester, Data Sheet, literature number 5989-8971EN.
- Agilent N5106A PXB MIMO Receiver Tester, Configuration Guide, literature number 5989-8972EN.

35

Related Literature

Agilent Email Updates

www.agilent.com/find/emailupdates
 Get the latest information on the products and applications you select.



www.lxistandard.org
 LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners
 Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

cdma2000 is a registered certification mark of the Telecommunications Industry Association. Used under license.

Bluetooth and the Bluetooth logos are trademarks owned by Bluetooth SIG, Inc. U.S.A. and licensed to Agilent Technologies, Inc.

WiMAX, Mobile WiMAX, and WiMAX Forum are trademarks of the WiMAX Forum.

Agilent Advantage Services

Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com
www.agilent.com/find/esg

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at: www.agilent.com/find/contactus

Americas	
Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444
Asia Pacific	
Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 898 8448
Singapore	1 800 375 8100
Taiwan	0800 047 8666
Other AP Countries	(65) 375 8100

Europe & Middle East	
Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0625 010 700*
	*125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200 88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries: www.agilent.com/find/contactus
 Revised: January 6, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012
 Published in USA, May 21, 2012
 5988-4039EN